

AVR Single phase Automatic Voltage regulator

Product Feature



Analog Display



LED Display



LCD Display

Capacity $\leq 1500\text{VA}$
Pulg and socket



Universal



Australia



France&Germany



Small Europe Type



Universal



USA




France



Germany

Capacity $\geq 2000\text{VA}$
Terminal input and output

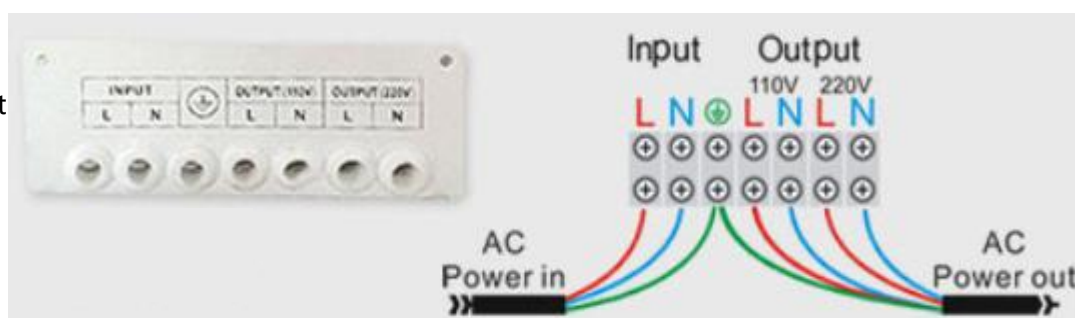

AVR Single phase Automatic Voltage regulator

Analog Display

LED Display

LCD Display


Specification		500VA	1000VA	1500VA	2000VA	3000VA	5000VA
Input	Phase	Single Phase					
	Voltage	150V~250V/130V~250V/100V~270V/80V~270V					
	Frequency	50/60HZ					
Output	Voltage	220~240V±2%					
	Power factor	0.8					
	Frequency	50/60HZ					
Protection	Under voltage	Yes					
	Over voltage	Yes					
	Over heat	Yes					
	Adjust Time	≤1S(When input voltage change less than 10%)					
	Bypass funtion	Optional					
	Overload	Yes					
	Short circuit	Yes					
Others	Insulation Resistance	≥5MΩ					
	Waveform Distortion	No waveform distortion					
Efficiency	AC-AC	98%					
Acoustic	Noise level	≤50dB					
Condition	Temperature	"-5°C - 45°C					
	Humidity	20%~90%					
Others	Correction speed	Less than 1 second when voltage fluction is less than 10%					

AVR Single phase Automatic Voltage regulator


Wall mounted Type



Stand type



Analog Display



LED Display



LCD Display

Specification		8000VA	10kVA	15kVA	20kVA	30kVA	10kVA(S)
Input	Phase	Single Phase					
	Voltage	150V~250V/130V~250V/100V~270V/80V~270V					
	Frequency	50/60HZ					
Output	Voltage	220~240V±2%					
	Power factor	0.8					
	Frequency	50/60HZ					
Protection	Under voltage	Yes					
	Over voltage	Yes					
	Over heat	Yes					
	Adjust Time	≤1S(When input voltage change less than 10%)					
	Bypass funtion	Optional					
	Overload	Yes					
	Short circuit	Yes					
Others	Insulation Resistance	≥5MΩ					
	Waveform Distortion	No waveform distortion					
Efficiency	AC-AC	98%					
Acoustic	Noise level	≤50dB					
Condition	Temperature	"-5°C - 45°C					
	Humidity	20%~90%					
Others	Correction speed	Less than 1 second when voltage fluction is less than 10%					